CONSTRUCTION & MATERIAL PROCESSING



EXCEPTIONAL SAFETY AND PERFORMANCE: OUR PRODUCTS MAKE THE DIFFERENCE IN THE CONSTRUCTION!

We are meeting the challenges of the construction industry head on creating robust and innovative products that control contamination; protect machinery from hydraulic failures; and deliver greater reliability, performance and efficiency.

With the vast majority of hydraulic system failures caused by the build-up of contamination, we have developed solutions for our customers that ensure quality, safety and cost savings at every stage of the construction process.

partnership

proven reliability

quality

longer machinery lifespan

worldwide support

MP Filtri has always forged close partnerships with customers thanks to its commitment to meeting their needs and delivering effective solutions. The company offers a wide range of high-performance products including:



Return Filters

MPFX

MPTX



Return Filters



Low Pressure Filters





High Pressure Filters



Beturn / Suction Filter



Elixir® Filters

SFEX Series Suction filters RFEX Series Return filters LFEX Series Low Pressure filters


RELIABILITY AND QUALITY, WHY MP FILTRI IS THE PERFECT PARTNER

State-of-the-art research and development programmes ensure our products are extensively tested and perfected in our cutting-edge laboratory. A passion for innovation drives everything we do.

Technology and expertise are in the company's DNA

THE MAIN FEATURES THAT DISTINGUISH OUR PRODUCTS ARE:

- A dramatic reduction in unplanned downtime
- Support from a dedicated team of technical and commercial specialists
- The latest research and development technologies
- A dedicated laboratory for customer-specific tests
- Authorised distributors worldwide
- A wide range of precise customisation options

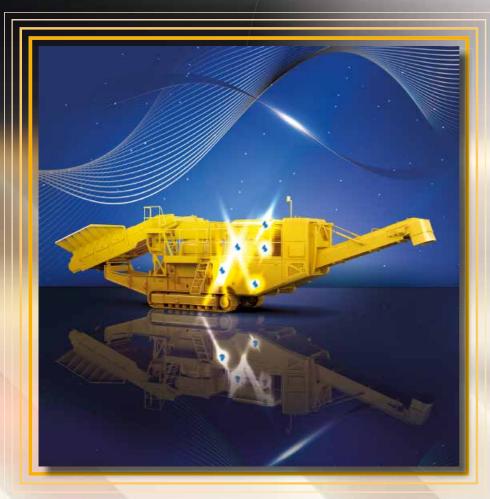

ALL OF OUR FILTERS COMPLY WITH ALL HYDRAULIC SECTOR REGULATIONS

MULTI-PASS ISO 16889

The ISO Multipass test is to evaluate filtration performance of a filter element.


This standard provides reproducible test methods and data determining filtration efficiency, contamination holding capacity, and differential pressure characteristics. The test can be used on filter media which have a filtration quotient (Beta value) of $\beta_{25(c)} \ge 75$ and a gravimetric end level in the tank of less than 200 mg/l.

The test is done using a constant supply of a contaminant ISO MTD (Medium Test Dust).

Filtration ISO standard Comparison				
$\beta_{x(c)} > 1000$	$\beta_x > 200$	MP Filtri		
ISO 16889	ISO 4572	Filter media code		
5 μm _(c)	3 µm	A(00)03		
7 μm _(c)	6 µm	A(00)06		
10 μm _(c)	10 µm	A(00)10		
16 μm _(c)	18 µm	A(00)16		
21 μm _(c)	25 µm	A(00)25		


Designed to thrive in even the most challenging working conditions

We maintain full control over every element of production from design to delivery

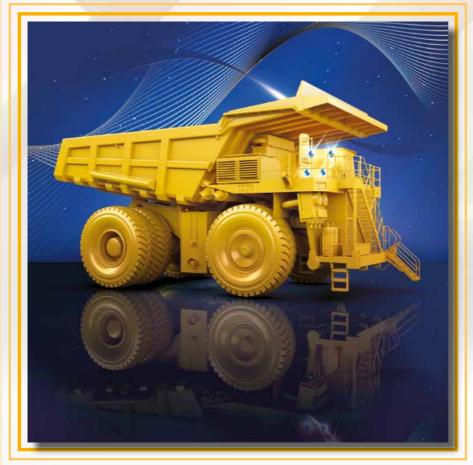


BETA VALUE STABILITY

FILTRATION RATING A(00)10, β 10 μ m_(c) >1000

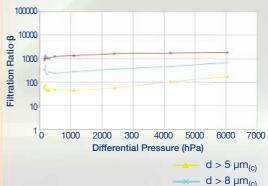

- d > 10 μ m_(c)

FILTER FINENESS

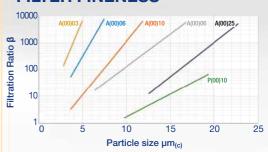


HYDRAULIC FILTRATION

Designing an effective filtration system requires a precise evaluation of its specific features, including: sensitivity of the individual components, the degree and type of contamination, circuit pressure,

flow rate, environmental conditions, fluid used and intervention cycles delivering longer machinery lifespans and reduced service costs.

SUCTION FILTERS

CTDO	up to	\mathbf{Q}_{max}
STRC Submerged suction filter,	l/min	gpm
with bypass	875	231



RETURN FILTERS

MDH
"Bubble-free"
deaeration filter
allows the reduction
of air inflow into the tank

	up to P _{max} bar psi		up to	Q _{max}
			l/min	gpm
	8 116		750	198
	10	145	500	132





MPTX

with air breather, easy filter element servicing

ELIXIR® enables easier maintenance with only the FEX filter elements needing to be replaced - resulting in a lower environmental impact than other models.

up to P _{max}		up to	up to Q _{max}	
bar psi		l/min	gpm	
16	232	300	79	



SFEX SERIES - Suction RFEX SERIES - Return LFEX SERIES - Low pressure





RETURN / SUCTION FILTERS

MRSX

Tank top filter with combined filtration on return and suction to the inlet at the hydrostatic transmissions in closed loop

up to P _{max}		up to Q _{max}	
bar	psi	l/min	gpm
10	145	300	79

LOW PRESSURE FILTERS

up to P _{max}		up to Q _{max}		
	bar psi		l/min	gpm
	80	1160	175	46







HIGH PRESSURE FILTERS

FMMX

High pressure filter for mobile applications, low flow rate

up to P _{max}		up to Q _{max}		
bar psi		l/min	gpm	
420	6092	300	79	
450	6527	630	166	

FHP

Typical high pressure filter for mobile applications, high flow rate



HIGH PRESSURE FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE

ATEX CERTIFIED PRODUCTS Standard ATEX Directive 2014/34/EU and UK Regulation S.I. 2016 No. 1107 (as amended).

up to P _{max}		up to Q _{max}	
bar	psi	l/min gpi	
420	6092	300	79

FMMXHigh pressure filter for mobile applications,

low flow rate



FILTER ELEMENTS

WIDE RANGE OF ELEMENT OPTIONS FOR MYCLEAN AND ZEROSPARK® CONCEPT FILTERS

Wide range of filter elements in various filtration grades for all MP Filtri filters and as interchangeable.



THE X CONCEPT FOR OUR FILTERS



THE ZANTISTATIC CONCEPT FOR OUR FILTERS



TANK ACCESSORIES

The complete range of tank accessories for hydraulic circuits comprises breather filters, filler and breather filters, filler caps, visual and electrical level indicators, pressure gauges selectors, flanges for fixing the oil tubes on the tank cover and inspection covers.

Filler and breather filters have a dual function at the tank inlet filtering incoming air pre-filtering the fluid through the basket. This prevents the entry of foreign bodies during the filling or refilling operations.

AIR BREATHERS AND FILLER PLUGS



TAP90 up to P_{max} Filling caps and air breathers I/min gpm with multiple technical solutions 550 145 **TAP114** 3000 793 Nylon oil filler and air breather 1600 423 filler cap

SAP115 Filler plug and polyamide air filters



VISUAL OIL LEVEL INDICATORS

Available in three sizes, to monitor the fluid in the tank



POWER TRANSMISSION

COUPLINGS

Drive couplings provide the means by which power is transmitted from the electric motor to the hydraulic pump.



AKG complete couplings are certificated: ATEX 2014/34/EU & U.K. Regulation S.I. 2016 No. 1107 (as amended)

The e-PTO coupling is specifically for electrically powered power take-offs







BELL-HOUSINGS

Bell-Housings are used as connecting elements between IEC electric motors and a wide range of hydraulic pumps available on the international market



CONTAMINATION CONTROL SOLUTIONS

CONTAMINATION **MONITORING PRODUCTS**



LPA3 Portable **Light** Extinction Particle Analyser

CML4 Compact Portable Contamination Monitor

IN-LINE CONTAMINATION **MONITORS**



ICM 2.0 In-Line Contamination Monitor



ICM 4.0 Wifi-enabled In-line **Contamination Monitor**

MOBILE FILTRATION UNIT

up to Q_{max}



UFM 051

Mobile transfer and filtration units with ICM In-Line **Contamination Monitor** MP Filtri designs and manufactures a complete range of contamination control solutions aimed at increasing the life and productivity developed by our hydraulic circuits.

The technology developed by our Contamination Monitoring Products division allows preventive and predictive maintenance, guaranteeing maximum continuity of operation, a longer life cycle of components and a reduction in service and maintenance costs.

WORLDWIDE NETWORK

CANADA • CHINA • FRANCE • GERMANY • INDIA • SINGAPORE UNITED ARAB EMIRATES • UNITED KINGDOM • USA



PASSION TO PERFORM

